



# Self-Contained Emergency KELUAR Sign

## Slimline Design (Super bright LEDs)

**PEX-138-LED**  
**PEX-138R-LED**

**PEX-138-LED** Surface Mount



**PEX-138R-LED**  
Recess Mount

### Specifications

<b>Model</b> .....	➔ PEX-138LED / PEX-138R-LED.
<b>Mode</b> .....	➔ Maintained.
<b>Weight</b> .....	➔ ~2.8 Kg (surface) / ~3.0 Kg (recess).
<b>Battery</b> .....	➔ 2 x 1.2V 1.6AH Ni-MH.
<b>Housing</b> .....	➔ Electro-galvanised sheet steel with powder coated paint.
<b>Charger</b> .....	➔ Constant current.
<b>Mounting</b> .....	➔ Surface mount to wall or ceiling / Ceiling recess mount.
<b>Dimension</b> .....	➔ 600 mm (L) x 66 mm (W) x 274 mm (H). 651 mm (L) x 60mm (W) 283 mm (H).
<b>Monitoring</b> .....	➔ Red LED indicator for charging.
<b>Compliance</b> .....	➔ MS 983 : 2004, MS 619 : Part 102 : Sect. 102.22 : 1985 (P). MS IEC 60598-1 : 2006. Jabatan Bomba Dan Penyelamat Malaysia certified.
<b>Light Source</b> .....	➔ 18 nos super bright LED (SMD).
<b>Input Voltage</b> .....	➔ 240 V +/- 10% 50/60 Hz.
<b>Recharge Period</b> .....	➔ 16 - 24 Hours.
<b>Back Up Duration</b> .....	➔ 3 Hours.
<b>Battery Protection</b> .....	➔ Low voltage cut-off to prevent over discharging.
<b>Power Consumption</b> .....	➔ < 5W.
<b>Ingress Of Protection</b> .....	➔ IP - 20.
<b>Operating Temperature</b> .....	➔ 0 °C to 65 °C.


For further enquiries, please contact :-  
**PNE SYSTEMS SDN. BHD.** (263861 D)  
No.3, Jalan SS26/13, Taman Mayang Jaya  
47301, Petaling Jaya, Selangor Darul Ehsan.  
Tel : (6)03-78037488 (Hunting)  
Fax : (6)03-78038509  
E-mail : sales@pnesys.com.my  
Website : www.pnesys.com.my



*Note : Due to continuous development and improvement, our company reserves the right to change specifications without notice.*

# MODEL PEX-138-LED / PEX-138R-LED

## Self-Contained Emergency Keluar Sign Slimline Design

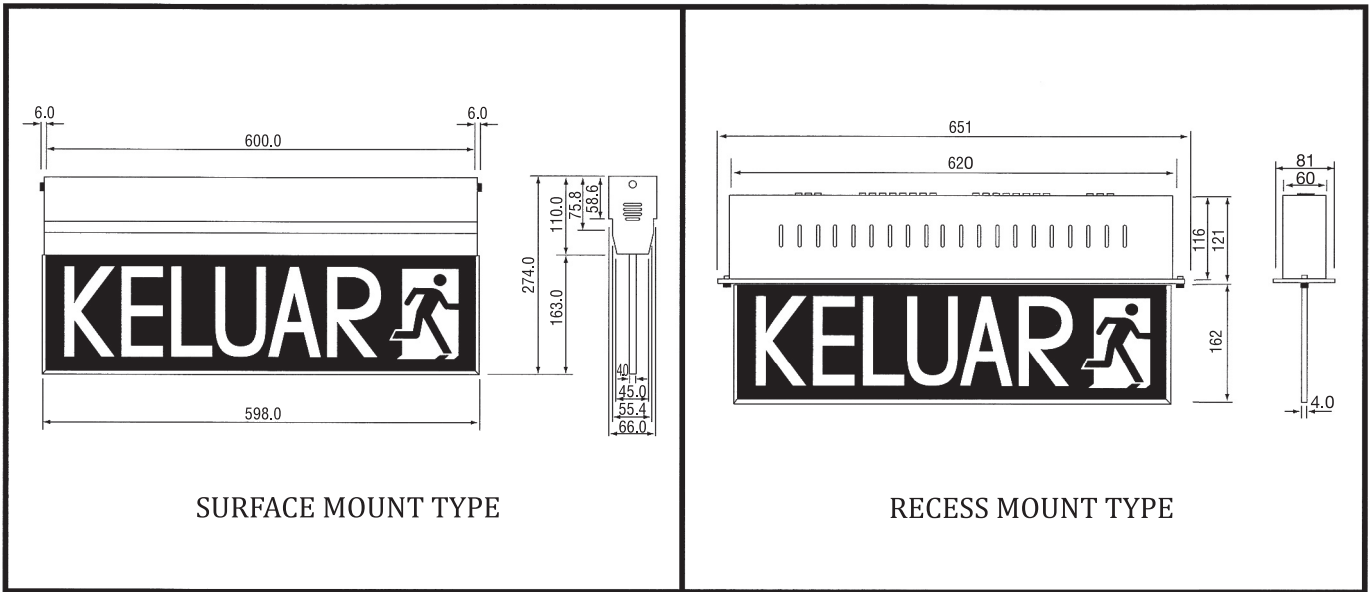

### Ordering Guide

Model	PEX – 138 – LED (Surface)	PEX – 138R – LED (Recess)	LEGEND
Normal (Standard)	PEX-138-LED	PEX-138R-LED	
Single-side Arrow To Right	PEX-138-LED/RA	PEX-138R-LED/RA	
Single-side Arrow To Left	PEX-138-LED/LA	PEX-138R-LED/LA	
Single-side Arrow Straight Ahead	PEX –138-LED/SA	PEX –138R-LED/SA	
Double-side with Arrow	PEX –138-D/LED	PEX –138RD/LED	

For further enquiries, please contact :  
**PNE SYSTEMS SDN. BHD.** (263861 D)  
 No. 3, Jalan SS 26/13,  
 Taman Mayang Jaya, 47301 Petaling Jaya,  
 Selangor Darul Ehsan, Malaysia.  
 Tel : 03-7803 7488 (Hunting)  
 Fax: 03-7803 8509  
 E-mail: sales@pnesys.com.my



Note : Due to continuous development and improvement, our company reserves the right to change specification without notice.