



300M UNIVERSAL BEAM CLAMP



CERTIFICATIONS



FEATURES

Universal beam clamp for standard beams

SPECIFICATIONS

Material: Cast Iron

Finish: Electrogalvanized

Table 1/2

Catalog Number	Item Name	Hole Type	Hole Size(HS)	Flange Thickness(FT)	A	Torque(TQ)
30009MM	389500	Plain	9 mm	18 mm Max	21 mm	14 N-m
30011MM	389510	Plain	11 mm	20 mm Max	23 mm	14 N-m
30013MM	389520	Plain	13 mm	26 mm Max	35 mm	14 N-m
30017MM	389505	Plain	17 mm	28 mm Max	30 mm	14 N-m
300M10	386820	Threaded	M10	20 mm Max	23 mm	14 N-m
300M12	386830	Threaded	M12	26 mm Max	35 mm	14 N-m

Table 2/2


Catalog Number	Item Name	Static Load(F)	Packing Quantity	Certifications
30009MM	389500	1,200 N	1.0000	ITB, VdS G4005005
30011MM	389510	2,500 N	1.0000	FM, ITB, VdS G4005005
30013MM	389520	3,500 N	1.0000	FM, ITB, VdS G4913044

Catalog Number	Item Name	Static Load(F)	Packing Quantity	Certifications
30017MM	389505	5,500 N	1.0000	FM, ITB, VdS G4031026
300M10	386820	2,500 N	1.0000	FM, ITB, VdS G4005005
300M12	386830	3,500 N	1.0000	FM, ITB, VdS G4913044

ADDITIONAL PRODUCT DETAILS

Setscrew must be tightened and torqued onto the sloped side of the I-beam.

DIAGRAMS

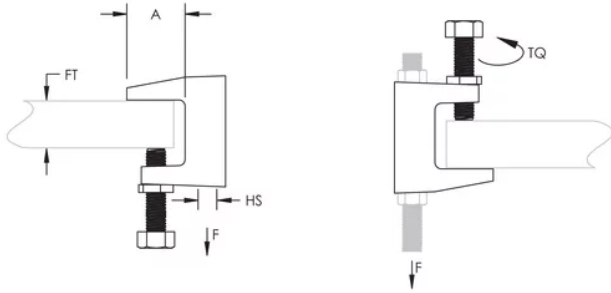

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

North America

+1.800.753.9221
Option 1 – Customer Care
Option 2 – Technical Support

Europe

Netherlands:
+31 800-0200135
France:
+33 800 901 793

Europe

Germany:
800 1890272
Other Countries:
+31 13 5835404

APAC

Shanghai:
+ 86 21 2412 1618/19
Sydney:
+61 2 9751 8500



Our powerful portfolio of brands:
nVent.com **CADDY ERICO HOFFMAN RAYCHEM SCHROFF**
TRACER