


NE HAWKE A2 CABLE GLAND

NE HAWKE A2 brass indoor cable gland is used with all types of unarmoured cable, providing mechanical cable retention. Sealing is provided on the cable outer sheath .

TECHNICAL INFORMATION

Type	: A2
Design Specification	: BS 6121 : Part 1: 1989
Ingress Protection Rating	: IP66
Standard Gland Material	: Brass
Optional Gland Material	: Nickel Plated
Seal Area	: Cable Outer Sheath
Cable Type	: Unarmoured
Available Accessories	: Steel/Brass Locknut, PVC/LSF Shroud, Brass Earth Tag, Nylon Washer, Brass Reducer

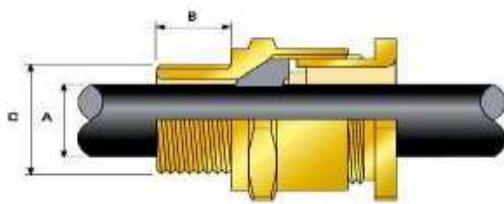

CABLE GLAND SELECTION TABLE

Cable Gland Size	Entry Thread		Cable Acceptance Detail		Hexagon Dimensions	
	Dia. C (mm)	Leth B (mm)	Dia. A		Across Flat	Across Corners
			Max (mm)	Max (mm)		
20S	20	10	8.00	11.70	24.50	25.00
20L	20	10	11.00	14.00	24.00	26.60
25S	25	10	12.00	17.00	27.00	30.50
25L	25	10	13.00	20.50	29.50	33.00
32S	32	10	16.50	23.00	35.00	38.50
32L	32	10	19.00	26.30	39.00	43.00
40S	40	15	23.00	29.00	43.00	48.00
40L	40	15	25.00	33.00	46.00	51.00
50S	50	15	31.50	39.00	56.00	62.00
50L	50	15	36.50	44.00	62.00	68.00
63S	63	15	42.50	50.00	66.00	73.00
63L	63	15	48.00	56.00	72.00	79.00
75S	75	15	54.50	62.00	77.00	85.00
75L	75	15	60.50	68.00	86.00	95.00

All dimensions in millimetres, please specify when ordering



NANYANG ELECTRIC CO.(M) SDN BHD (14368-T)

34, Lorong Kuang Bulan, Taman Kepong, 52100 Kuala Lumpur, Malaysia.

Tel: 03-6274 0199 Fax: 03-6274 5062/ 5127

website: www.nanyangelectric.com Email: office@nanyangelectric.com