




CKS-2A

SLIM TYPE

LED Self-Contained Emergency
Keluar Sign



Dimensions (mm)

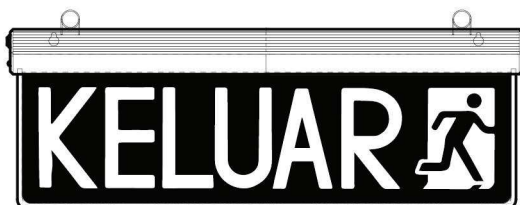

Technical Information

Mode of Operation :	Maintained
Input Voltage :	240V \pm 10%, 50/60Hz
Battery Type :	3.6V, 1000mAH Nickel-cadmium Battery
Lamp Type :	20pcs x 0.065W LED
Operation :	0°C to 60°C
Temperature :	
Charger :	Constant Current
Indication Type :	Red LED "On" Indicates Charging Mode. Push Test-Switch to Simulate Power Failure.
Backup Duration :	3 Hours
Fitting :	Die-cast Aluminum Casing
Construction :	in Frosted Green with Acrylic Plate.
Weight :	\pm 0.9kg
Warranty :	Component - 5 Years Battery - 1 Year <i>(Terms & Condition Apply)</i>
Certified Compliance :	Malaysia Standards MS-983:2004, MS-619-2-22:2005, MS IEC 60598-1:2012, IP20
Certified By :	SIRIM QAS International Sdn. Bhd. Jabatan Bomba dan Penyelamat Malaysia
Application :	Surface Mounting
Dimension :	in mm
Tolerance :	\pm 0.03mm


CKS-2A/DS

SLIM TYPE




LED Self-Contained Emergency
Keluar Sign (Double Sided with Arrow)

Technical Information

Mode of Operation:	Maintained
Input Voltage	: 240V ± 10%, 50/60Hz
Battery Type	: 3.6V, 1000mAH Nickel-cadmium Battery
Lamp Type	: 20pcs x 0.065W LED
Operation Temperature	: 0°C to 60°C
Charger	: Constant Current
Indication Type	: Red LED "On" Indicates Charging Mode. Push Test-Switch to Simulate Power Failure.
Backup Duration	: 3 Hours
Fitting Construction	: Die-cast Aluminum Casing in Frosted Green with Acrylic Plate
Weight	: ± 0.9kg
Warranty	: Component - 5 Years Battery - 1 Year <i>(Terms & Condition Apply)</i>
Certified Compliance	: Malaysia Standards MS-983:2004 MS-619-2-22:2005, MS IEC 60598-1:2012, IP20
Certified By	: SIRIM QAS International Sdn. Bhd. Jabatan Bomba dan Penyelamat Malaysia
Application	: Surface Mounting
Dimension	: in mm
Tolerance	: ± 0.03mm



Dimensions (mm)

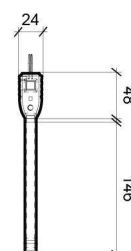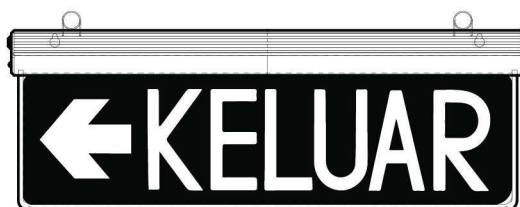



CKS-2A

Recessed Frame Cover



Dimensions (mm)

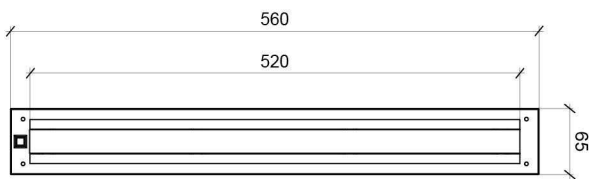

Accessories: Recessed Frame Cover is Optional (Exclude)

