



NE-CW Cable Gland


NE CW type brass indoor and outdoor cable gland is used with all types of single wire armour (SWA) cable providing mechanical cable retention and electrical continuity through armour wire termination.

Clamping ring allows the cable to be easily disconnected from the equipment, for maintenance etc.

This feature also provides remote also known as off procedures when the termination is to be conducted in areas restricted access. This cable glands is designed and tested as per BS 6121:1989.

It meets the requirement of EN 50262: 1999 and IEC 62444.

NE CW CABLE GLAND SELECTION CHART

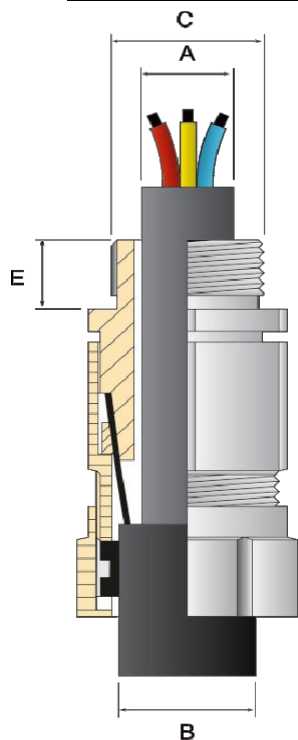

Gland Size	Entry Thread		Cable Acceptance Detail			Across Flat D	Across Corner
	Dia. C	Length Min. E	Dia. "A" Max	Dia. "B" Max	Armour Diameter		
20 S	20	10	11.6	16	0.9/1.25	22	25
20 L	20	10	14.5	20.5	0.9/1.25	26	29
25 S	25	10	19	24	1.25/1.60	31.5	35.5
25 L	25	10	20.5	27	1.25/1.60	34	38
32 S	32	10	24	30.5	1.60/2.00	38.5	43.5
32 L	32	10	27	33	1.60/2.00	41	46.5
40 S	40	15	30	37	1.60/2.00	46	51
40 L	40	15	33.5	41	1.60/2.00	48.5	55
50 S	50	15	40	47.5	2.00/2.50	57	64
50 L	50	15	44	52.6	2.00/2.50	61	68
63 S	63	15	50.5	60	2.5	70	79
63 L	63	15	56	66	2.5	78	86
75 S	75	15	62	72	2.5	84	95
75 L	75	15	68	78	2.5	92	102
90 L	90	20	79	90	2.50/3.15	105	118

All dimensions are in millimetre