


## TIMER 限時繼電器

### AH3-□


DIMENSIONS(mm)  
尺寸

50H×40W×57.5D



SURFACE(-N)  
露出型

PF085A & SH-3

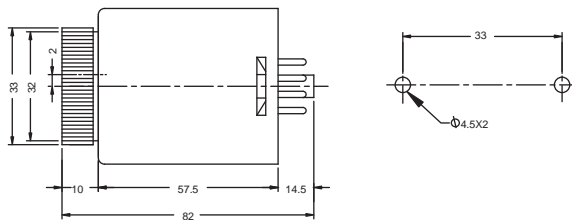

FULL TIMING RANGE 時間範圍		SEC: 1, 3, 6, 10, 30, 60 MIN: 3, 6, 10, 30, 60 H R: 3, 6, 10, 24	AH3-1 限時 1C 5A	
RATED VOLTAGE 額定電壓		DC(V): 12, 24 AC(V): 12, 24, 48, 110, 220, 240 380, 415, 440, 50/60Hz		
INDICATOR OPERATING 指示燈動作		ON-UP Two indicator lamp ON-UP 兩只指示燈	AH3-2 限時 2C 5A	
L I F E 壽命	MECHANICAL 機械	$5 \times 10^6$ times		
	ELECTRICAL 電氣	$10^5$ times	AH3-3 限時 1C 5A, 瞬時 1C 5A	
A C C U R A C Y 精確度	REPEAT ERROR 往復誤差	$\pm 1\%$ max		
	SETTING ERROR 設定誤差	$\pm 10\%$ max		
	VOLTAGE ERROR 電壓誤差	$\pm 1\%$ max		
	TEMP. ERROR 溫度誤差	$\pm 2\%$ max		
RESET TIME 複歸時間		0.1 sec max		
CONSUMED POWER 消耗功率		2VA		
AMBIENT TEMPERATURE 使用周圍溫度		-10°C ~ +55°C		
AMBIENT HUMIDITY 使用周圍濕度		45~85%RH		
WEIGHT 重量		160g		