

2020

CATALOG



**Provide Quality & Reliable Products
& Promote Users Safety**

Efficiency and Consistency, Resulting Lower Cost and Risk.

工业插头系列

Industrial plugs



概述 Outline

概述

UKS系列接插装置，是我公司根据国家相关标准和用户实际需要开发的电气产品，具有防护等级高、安全可靠、外形美观、接线方便、使用寿命长等特点。产品主要有插头、插座、连接器、附加插头、附加插座、机械连锁、低压系列、大电流系列、专用冷藏集装箱等，适用范围广泛。此系列产品改进了抓握进出便于插拔操作的设计，外部电缆紧固装置能够保护内部垫圈，带电导体的接触载体都是采用耐高温的材料，整体防护等级达到IP44或IP67，更好提高了安全性。产品广泛应用于石油、化工、冶金、电厂、煤矿、机械、轻纺、港口、码头等行业。

Outline

As per the relative standards and real needs of users, UKS series plug socket are developed with the features of high ingress protection, safety & reliability, amazing structure, easy wiring, long life time and others. The main products are plug, connector, panel mounted plug socket, wall mounted plug socket, interlocked switch socket, low-voltage series, high-current series and refrigerated container series. For the better safety performance, the improvements are performed as follows: a. the improved design of easy operation; b. inner gasket protected by external cable grip; c. high heat-resistant materials of electric contact carriers; d. Ingress protection: IP44/IP67. On the basis of these, our products are widely used in oil, chemical industry, metallurgy, power plants, coal mines, machinery, textile, ports, docks and other industries.

产品名称示意图
The Model Definition



主要技术指标 详见分类。
The main parameter, please check in the detailed classifications.

使用 **Usage**
用户需正确接入电源线，使用时，请不要带电插拔。 Please connect with power cord correctly and do not plug in/ Pull out the cive devices

维护 **Maintenance**
接插装置虽具有耐腐蚀、抗冲击的特性，但用户使用中还应保持产品表面和内部整洁，随时除去油污、水垢、灰尘和其它附着于表面的脏物。 Plug sockets are corrosion & impact resistance, and please keep the products clean and wipe the oil, scale, dust and other dirt away.



订货须知 **Order**
用户订货只须写明规格型号及订货数量即可。如有特殊要求，我们也可根据用户要求专门制作 Please specify the details and quantity when you place orders. Other requirements if there is, they could be customized for you.

机械联锁A Interlocked Switch Socket A

产品外观
Photo



外形尺寸
Dimension

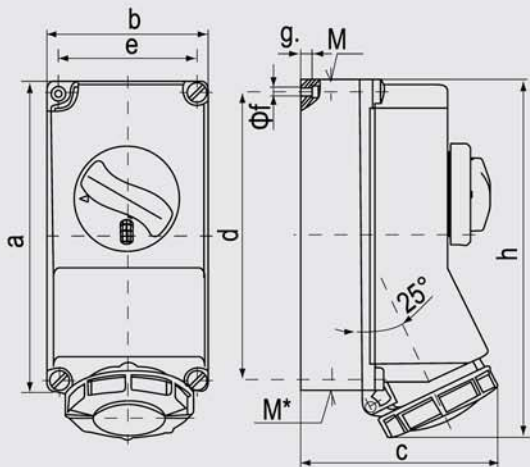

		110 V 50 a. 60 Hz			230 V 50 a. 60 Hz			400 V 50 a. 60 Hz			500 V 50 a. 60 Hz			>50 - 500 V 100- 300 Hz			>50 - 500 V a. 300- 500 Hz		
电流	极数																		
Current	Pole																		
		3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	
		4h	4h	4h	6h	9h	9h	9h	6h	6h	7h	7h	7h	10h	10h	10h	2h	2h	

选型
Description

⚡ IP67 CEE / IEC 插座，带开关，带机械联锁					
⚡ IP67 CEE / IEC Switched socket with mechanical interlock					
16	3	UKS-I136-4	UKS-I136-6	UKS-I136-9	UKS-I136-7
16	4	UKS-I146-4	UKS-I146-9	UKS-I146-6	UKS-I146-7
16	5	UKS-I156-4	UKS-I156-9	UKS-I156-6	UKS-I156-7
32	3	UKS-I236-4	UKS-I236-6	UKS-I236-9	UKS-I236-7
32	4	UKS-I246-4	UKS-I246-9	UKS-I246-6	UKS-I246-7
32	5	UKS-I256-4	UKS-I256-9	UKS-I256-6	UKS-I256-7
63	3	UKS-I336-4	UKS-I336-6	UKS-I336-9	UKS-I336-7
63	4	UKS-I346-4	UKS-I346-9	UKS-I346-6	UKS-I346-7
63	5	UKS-I356-4	UKS-I356-9	UKS-I356-6	UKS-I356-7

参数 Parameter	电流 (A) Current(A)		16			32			63		
	极数 (P) Pole (P)		3	4	5/7	3	4	5/7	3	4	5
尺寸 Dimension (mm)	a		225	225	225	225	225	225	264	264	264
	b		118	118	118	118	118	118	163	163	163
	c		144	146	147	152	152	153	196	196	196
	d		208	208	208	208	208	208	240	240	240
	e		101	101	101	101	101	101	140	140	140
	f		6.3	6.3	6.3	6.3	6.3	6.3	8.1	8.1	8.1
	g		8	8	8	8	8	8	8	8	8
	h		252	255	259	268	268	274	300	300	300
	M		2x32	2x32	2x32	2x32	2x32	2x32	40	40	40
	M*		2x25	2x25	2x25	2x25	2x25	2x25	2x40	2x40	2x40
	最大电缆直径 (mm)		25	25	25	25	25	25	32	32	32
	导线横截面积		1.5	1.5	1.5	2.5	2.5	2.5	6	6	6
	从最小至最大		-4	-4	-4	-10	-10	-10	-25	-25	-25
	Max cable diameter (mm)										
	Conductor cross section (mm²)										
	Min. - max.										

符合德国工业标准 DIN VDE 0623, 欧洲/国际标准 EN/IEC 60309-2
其它电压和频率的产品请来函询问

German industrial standard: DIN VDE 0623, European / International standard: EN / IEC 60309-2
Other requirements, please contact us freely