


## Vinyl-Insulated Single Crimp Spade Terminals

Brand	KF <sup>®</sup>
Finish/Coating	Tinned
Base Materials	Copper, PVC
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP



Spec (American AWG)	22-16	16-14	14-12	12-10	8	6	4
Spec (JIS AWG)	1.25	2	3.5	5.5	8	14	22
Spec (DIN AWG)	1	2.5		4.0-6.0	10	16	25
Spec (GB mm <sup>2</sup> )	0.5-1.5	2.5	4	6	10	16	25
Max Current	19	27	37	48	62	88	115
Operating Voltage	600V						
Temperature Withstand	75°C						

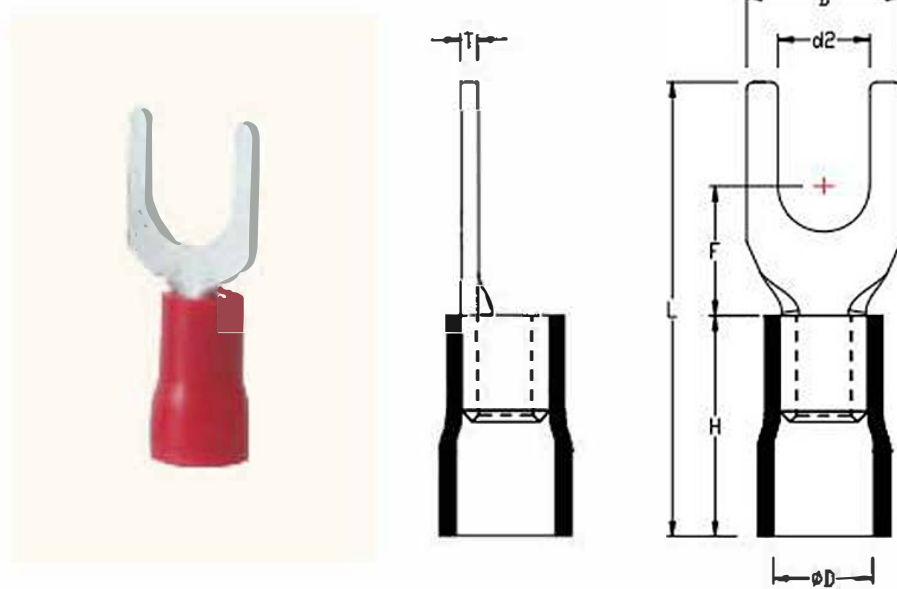

Wire Range	SKU#	MFG#	Stud Size		Dimension(mm)								Color	Tool	pcs/pack			
			USA	Merica	d2	B	F	L	H	D	T							
A.W.G. 22-16 0.5~1.5mm <sup>2</sup>	KFSV010	SV1.25-3	#4	3	0.126	3.2	0.217	5.5	0.256	6.5	0.827	21.0	0.394 (10.0)	0.177 (4.5)	0.03 (0.75)	red	IZUMI 3#	1000
	KFSV011	SVS1.25-3.5	#6	3.5	0.146	3.7	0.217	5.5	0.256	6.5	0.827	21.0						1000
	KFSV012	SVL1.25-3.5	#6	3.5	0.146	3.7	0.256	6.5	0.256	6.5	0.827	21.0						1000
	KFSV013	SVS1.25-4	#8	4	0.169	4.3	0.256	6.5	0.256	6.5	0.827	21.0						1000
	KFSV014	SVM1.25-4	#8	4	0.169	4.3	0.276	7.0	0.256	6.5	0.827	21.0						1000
	KFSV015	SVL1.25-4	#8	4	0.169	4.3	0.315	8.0	0.256	6.5	0.827	21.0						1000
	KFSV016	SVS1.25-5	#10	5	0.209	5.3	0.315	8.0	0.256	6.5	0.827	21.0						1000
	KFSV017	SVL1.25-5	#10	5	0.209	5.3	0.374	9.5	0.256	6.5	0.827	21.0						1000
	KFSV018	SVS1.25-6	1/4"	6	0.252	6.4	0.374	9.5	0.256	6.5	0.827	21.0						1000
KFSV019	SVL1.25-6	1/4"	6	0.252	6.4	0.472	12.0	0.433	11.0	1.063	27.0	1000						
A.W.G. 16-14 1.5~2.5mm <sup>2</sup>	KFSV020	SV2-3	#4	3	0.126	3.2	0.217	5.5	0.256	6.5	0.827	21.0	0.394 (10.0)	0.197 (5.0)	0.031 (0.8)	blue	IZUMI 4#	1000
	KFSV021	SVS2.-3.5	#6	3.5	0.146	3.7	0.217	5.5	0.256	6.5	0.827	21.0						1000
	KFSV022	SVL2-3.5	#6	3.5	0.146	3.7	0.276	7.0	0.256	6.5	0.827	21.0						1000
	KFSV023	SVS2-4	#8	4	0.169	4.3	0.256	6.5	0.256	6.5	0.827	21.0						1000
	KFSV024	SVM2-4	#8	4	0.169	4.3	0.276	7.0	0.256	6.5	0.827	21.0						1000
	KFSV025	SVL2-4	#8	4	0.169	4.3	0.315	8.0	0.256	6.5	0.827	21.0						1000
	KFSV026	SVS2-5	#10	5	0.209	5.3	0.315	8.0	0.256	6.5	0.827	21.0						1000
	KFSV027	SVL2-5	#10	5	0.209	5.3	0.374	9.5	0.256	6.5	0.827	21.0						1000
	KFSV028	SVS2-6	1/4"	6	0.252	6.4	0.374	9.5	0.256	6.5	0.827	21.0						1000
KFSV029	SVL2-6	1/4"	6	0.252	6.4	0.472	12.0	0.433	11.0	1.063	27.0	1000						
A.W.G. 14-12 2.5~4mm <sup>2</sup>	KFSV030	SV3.5-3	#4	3	0.126	3.2	0.217	5.5	0.276	7.0	1.004	25.5	0.512 (13.0)	0.236 (6.0)	0.039 (1.0)	black	IZUMI 5#	1000
	KFSV031	SV3.5-4	#8	4	0.169	4.3	0.315	8.0	0.276	7.0	1.004	25.5						1000
	KFSV032	SV3.5-5	#10	5	0.209	5.3	0.315	8.0	0.276	7.0	1.004	25.5						1000
	KFSV033	SV3.5-6	1/4"	6	0.252	6.4	0.472	12.0	0.354	9.0	1.122	28.5						500
A.W.G. 12-10 4~6mm <sup>2</sup>	KFSV040	SV5.5-3.5	#6	3.5	0.146	3.7	0.335	8.5	0.295	7.5	1.004	25.5	0.512 (13.0)	0.256 (6.5)	0.039 (1.0)	yellow	IZUMI 5#	1000
	KFSV041	SVS5.5-4	#8	4	0.169	4.3	0.335	8.5	0.295	7.5	1.004	25.5						1000
	KFSV042	SVL5.5-4	#8	4	0.169	4.3	0.374	9.5	0.295	7.5	1.004	25.5						1000
	KFSV043	SV5.5-5	#10	5	0.209	5.3	0.354	9.0	0.295	7.5	1.004	25.5						1000
	KFSV044	SVS5.5-6	1/4"	6	0.252	6.4	0.354	9.0	0.295	7.5	1.004	25.5						1000
	KFSV045	SVL5.5-6	1/4"	6	0.252	6.4	0.472	12.0	0.472	12.0	1.24	31.5						500
KFSV046	SV5.5-8	1/4"	8	0.331	8.4	0.551	14.0	0.453	11.5	1.201	30.5	500						
A.W.G. 8 8mm <sup>2</sup>	KFSV050	SV8-4	#8	4	0.169	4.3	0.335	8.5	0.354	9.0	1.181	30.0	0.591 (15.0)	0.315 (8.0)	0.047 (1.2)	red	OPT TP - 80	500
	KFSV051	SV8-5	#10	5	0.209	5.3	0.453	11.5	0.335	8.5	1.22	31.0						500
	KFSV052	SV8-6	1/4"	6	0.252	6.4	0.453	11.5	0.335	8.5	1.22	31.0						500
	KFSV053	SV8-8	1/4"	8	0.331	8.4	0.571	14.5	0.472	12.0	1.378	35.0						250
A.W.G. 6 14mm <sup>2</sup>	KFSV060	SV14-5	#10	5	0.209	5.3	0.433	11.0	0.433	11.0	1.535	39.0	0.807 (20.5)	0.394 (10.0)	0.055 (1.4)	blue	OPT TP - 80	250
	KFSV061	SV14-6	1/4"	6	0.252	6.4	0.472	12.0	0.394	10.0	1.516	38.5						250
	KFSV062	SV14-8	1/4"	8	0.331	8.4	0.531	13.5	0.433	11.0	1.516	38.5						250
A.W.G. 4 22mm <sup>2</sup>	KFSV070	SV22-8	1/4"	8	0.331	8.4	0.551	14.0	0.512	13.0	1.811	46.0	0.925 (23.5)	0.492 (12.5)	0.071 (1.8)	yellow	OPT TP - 80	100