




Features:

- * Material aluminium
- * Overload protection
- * Overcurrent protection
- * Over-temperature protection
- * Short circuit protection



*Home lighting

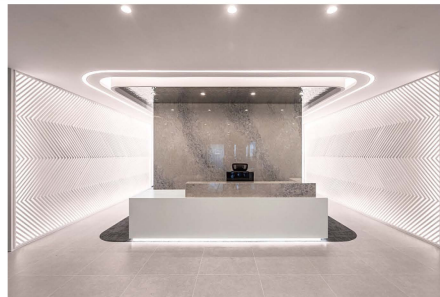

*Office lighting



*Commercial Lighting

Code	Input Voltage	Output Voltage and Current	Output Voltage and Current	Power (W)	Efficiency	Power Factor	Size (mm)	IP	Packing Qty (pcs/ctn)
JH-Q025	185-265V	12V 2A	24V 1A	25	>85%	>0.5	90*40*22	IP20	100
JH-Q036	185-265V	12V 3A	24V 1.5A	36	>85%	>0.5	100*40*22	IP20	100
JH-Q060	185-265V	12V 5A	24V 2.5A	60	>85%	>0.5	114*50*22	IP20	100
JH-Q100	185-265V	12V 8.3A	24V 4.1A	100	>85%	>0.5	138*50*22	IP20	50
JH-Q150	185-265V	12V 12.5A	24V 6.25A	150	>85%	>0.5	178*50*22	IP20	50
JH-Q200	185-265V	12V 16.6A	24V 8.3A	200	>85%	>0.5	178*50*22	IP20	50
JH-Q300	185-265V	12V 25A	24V 12.5A	300	>85%	>0.5	205*50*22	IP20	50
JH-Q400	185-265V	12V 33.3A	24V 16.6A	400	>85%	>0.5	238*50*22	IP20	50