

LY-03B Non-Insulated Receptacle & Tab Terminal


Model No.	Tab Width (mm)	Crimping Range		Weight (kg)	Length (mm)
		mm ²	AWG		
LY-03B	6.3	0.5-6	20-10	0.6	230

LY-48B Non-Insulated Receptacle & Tab Terminal


Model No.	Tab Width (mm)	Crimping Range		Weight (kg)	Length (mm)
		mm ²	AWG		
LY-48B	4.8/2.8	0.14-2.5	26-14	0.6	230

LY-63B Non-Insulated Receptacle & Tab Terminal


Model No.	Tab Width (mm)	Crimping Range		Weight (kg)	Length (mm)
		mm ²	AWG		
LY-63B	6.3	0.25-6	22-10	0.6	230

LY-03BM Non-Insulated Receptacle & Tab Terminal

By precise machining



Model No.	Tab Width (mm)	Crimping Range		Weight (kg)	Length (mm)
		mm ²	AWG		
LY-03BM	6.3	0.5-6	20-10	0.6	230

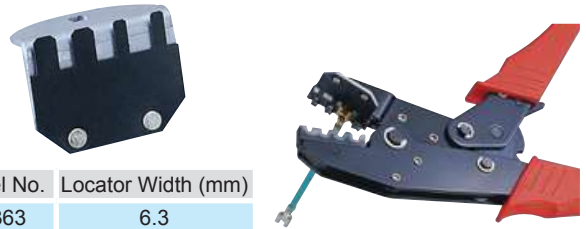
LY-03B63L & LY-03B48L & LY-48B48L

Non-Insulated Receptacle & Tab Terminal



With Locator

Model No.	Tab Width (mm)	Crimping Range		Weight (kg)	Length (mm)
		mm ²	AWG		
LY-03B63L	6.3	0.5-6	20-10	0.6	230
LY-03B48L	4.8	0.5-6	20-10	0.6	230
LY-48B48L	4.8	0.14-2.5	26-14	0.6	230

L0363 & L0348 & L4848 Locator


Model No.	Locator Width (mm)
L0363	6.3
L0348	4.8
L4848	4.8/2.8

LY-04B Non-Insulated Receptacle & Tab Terminal


Model No.	Tab Width (mm)	Crimping Range		Weight (kg)	Length (mm)
		mm ²	AWG		
LY-04B	6.3	0.5-6	20-10	0.6	230

LY-29B Non-Insulated Receptacle & Tab Terminal


Model No.	Tab Width (mm)	Crimping Range		Weight (kg)	Length (mm)
		mm ²	AWG		
LY-29B	2.8	0.14-1.5	26-16	0.6	230

LY-S1 Solar Terminal


Model No.	Crimping Range		Weight (kg)	Length (mm)
	mm ²	AWG		
LY-S1	2.5/4/6	14/12/10	0.6	230

LY-S2 Solar Terminal


Model No.	Crimping Range		Weight (kg)	Length (mm)
	mm ²	AWG		
LY-S2	2.5/4/6	14/12/10	0.6	230